



Electric Fan

Unmatched Performance, Eco-friendly Efficiency

PRODUCT INFORMATION

CHARACTERISTICS

- Existing Truflo fans
- Efficient and compact
- 12–65in (300–1650mm) dia.
- 12-96v low voltage
- 350-850v high voltage
- High flow and pressure
- Variable speed
- Radiator cleaning
- Fuel saving
- AC or DC power supply
- Air or liquid cooled motors
- Flexible mounting

APPLICATIONS

- Construction
- Mining
- Power generation
- Material handling
- Agriculture
- Off-highway

FAN TYPES


Full range of Truflo Fans

BLADE MATERIALS

PAG, PAX



Fan Options

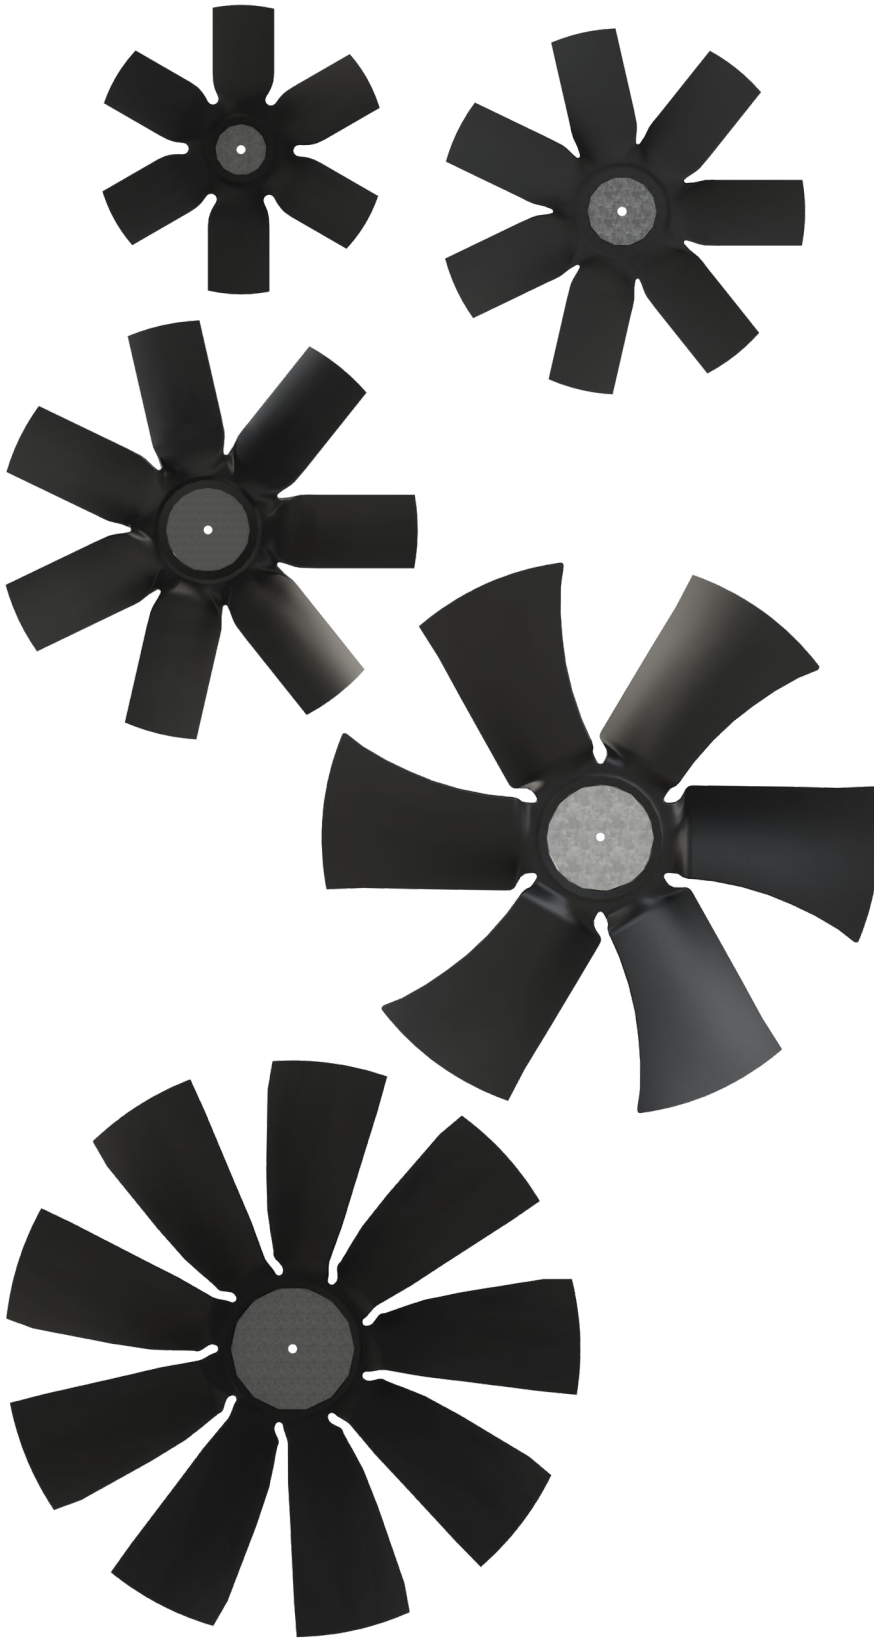

MOTOR OPTIONS

1.5–18.0 KW LOW VOLTAGE

- 16–40in (406–1000mm) diameter
- Permanent magnet AC (PMAC)
- 24–96v DC inverter
- High torque
- Convection or Liquid cooling
- IP67 protection
- Lightweight

18–108 KW HIGH VOLTAGE

- 30–65in (762–1650mm) diameter
- Permanent magnet AC (PMAC)
- 350–850v DC inverter
- High torque
- Liquid cooling
- Lightweight

FOR MORE INFORMATION

sales@truflo-airmovement.com

